



**TE-7-0.6-1.5  
Thermoelectric Module  
(Peltier Module)  
Specifications**

	Material Specifications (27 °C hot side temperature)	Material Specifications (50 °C hot side temperature)
Vmax (V)	0.9	1.0
I <sub>max</sub> (A)	1.1	1.1
Q <sub>max</sub> (W)	0.6	0.7
DT <sub>max</sub> (°C)	70	79
Operation/storage temperature	-40 °C to +80 °C	

Module *material* specifications are nominal values based on the hot-side temperature indicated. Thermoelectric material parameter tolerance is +/-10%.

In no case should the module temperature be allowed to exceed its maximum operation/storage temperature.

Please review all product and technical information, *Thermoelectric Module Mounting Procedure*, parameter definitions, FAQ's, and ordering information posted on our website before purchasing or using this product.

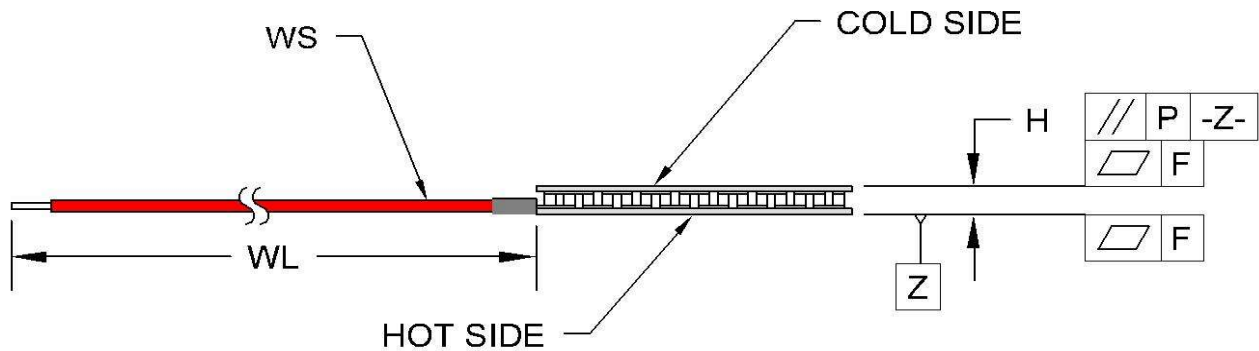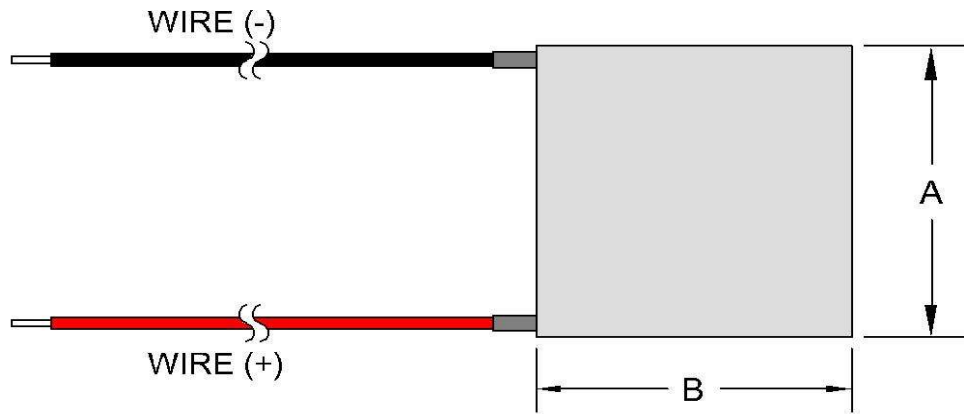

Width, A (mm)	4.3 +0.5/-0.2
Width, B (mm)	4.3 +0.5/-0.2
Height, H (mm)	3.25 ±0.15
Flatness, F (mm)	0.15
Parallelism, P (mm)	0.15
Wire Size, WS (mm <sup>2</sup> )	0.12
Wire Length, WL (mm)	50

**Optional Features and Notes:**





Add "P" to part number for sealing module with epoxy potting.  
Module includes 30 µm nickel metallization on hot and cold sides.  
The metallization does not include pre-tinning.

Performance graphs include thermal resistance of substrates.





RoHS Compliant







1590 Keane Drive, Traverse City, MI, 49696-8257 USA  
PH: 231-929-3966 FAX: 231-929-4163 email: cool@totech.com  
Expert Engineering, Precision Manufacturing: *Quality Thermal Solutions Delivered*

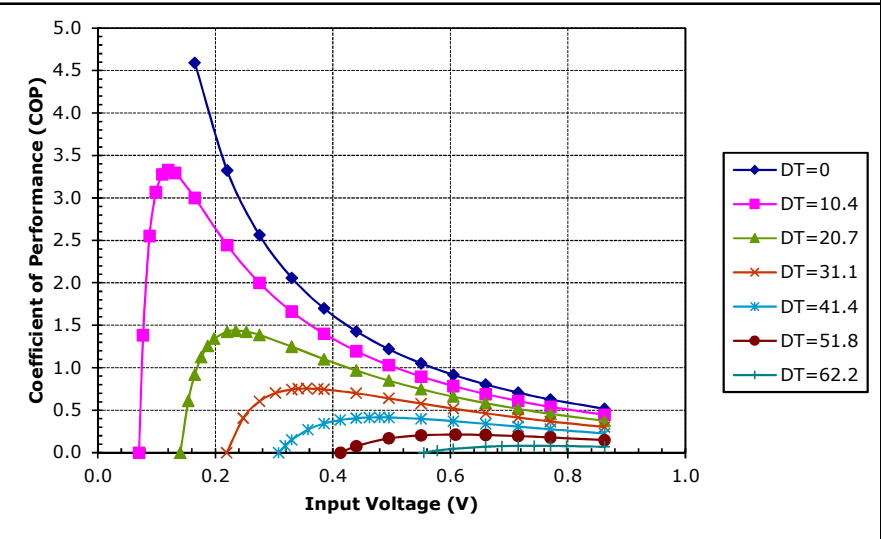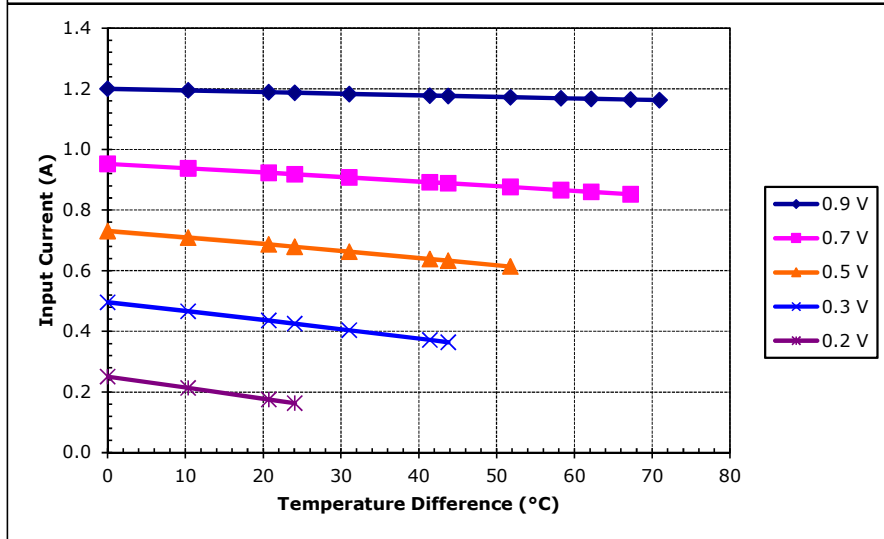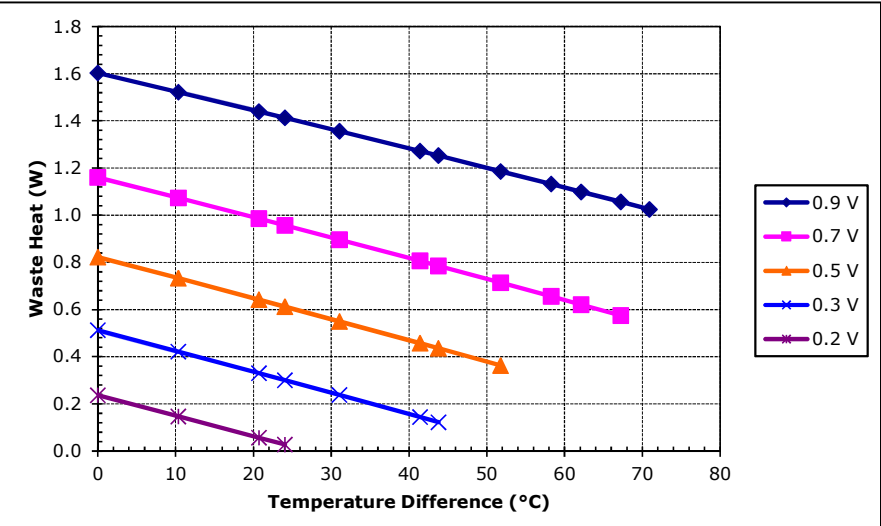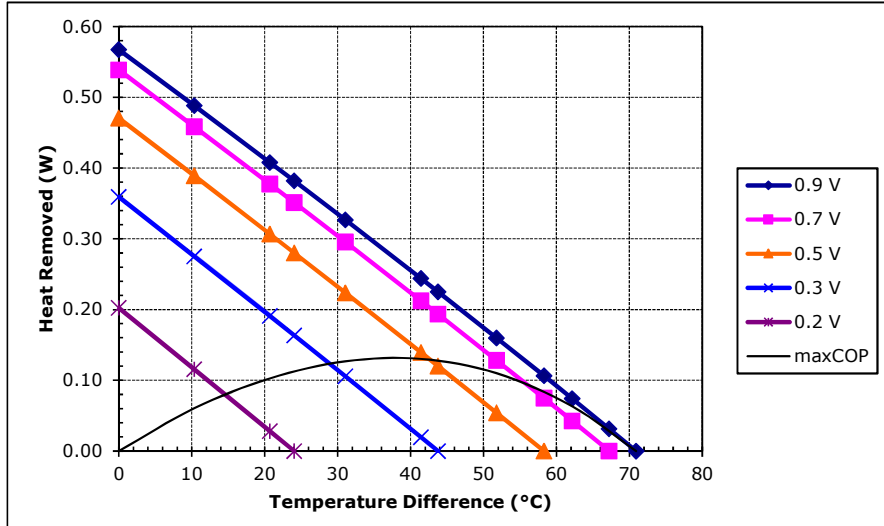





Unpotted TE-7-0.6-1.5 at a hot-side temperature of 30 °C

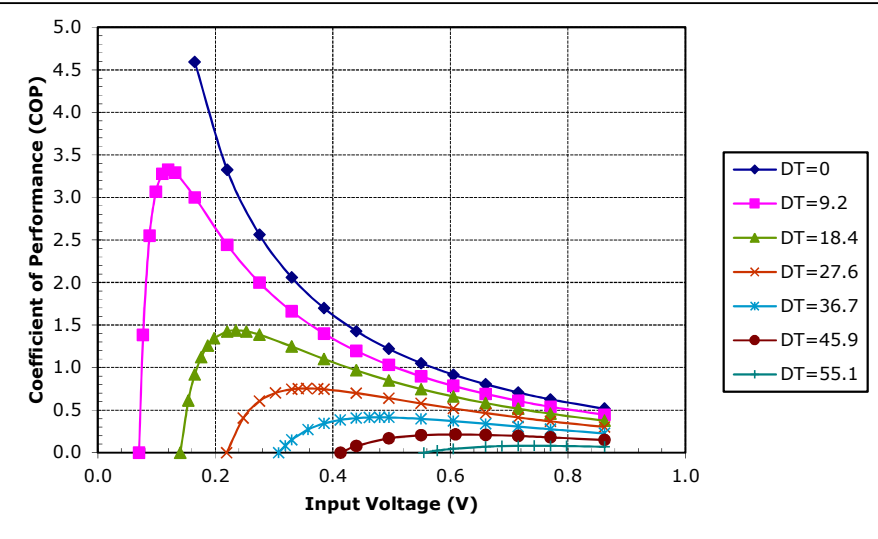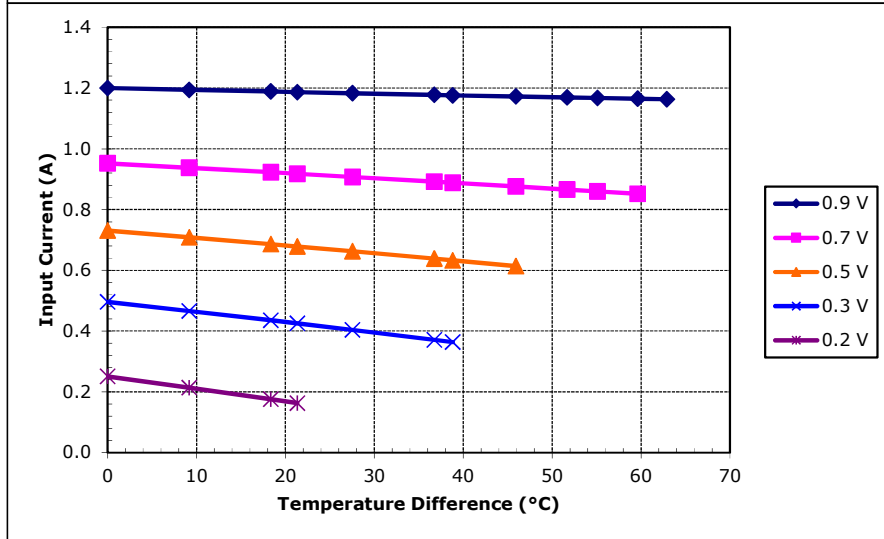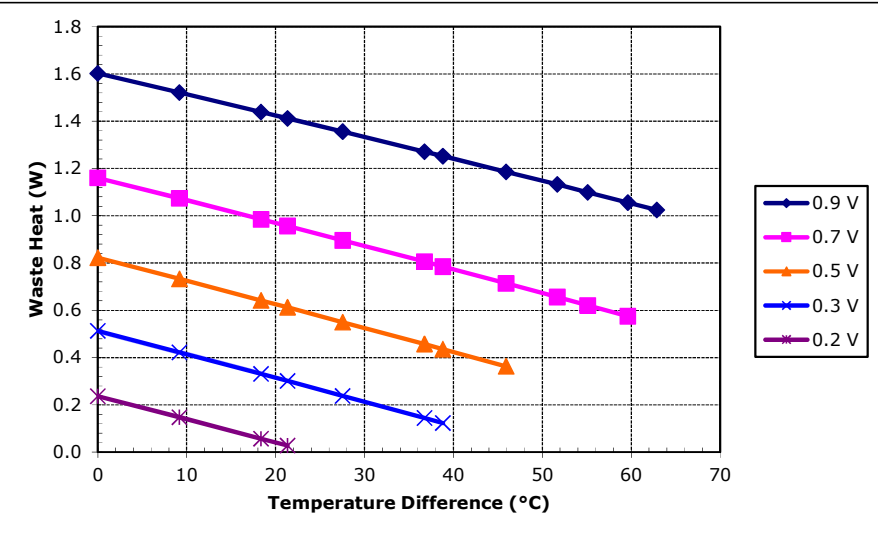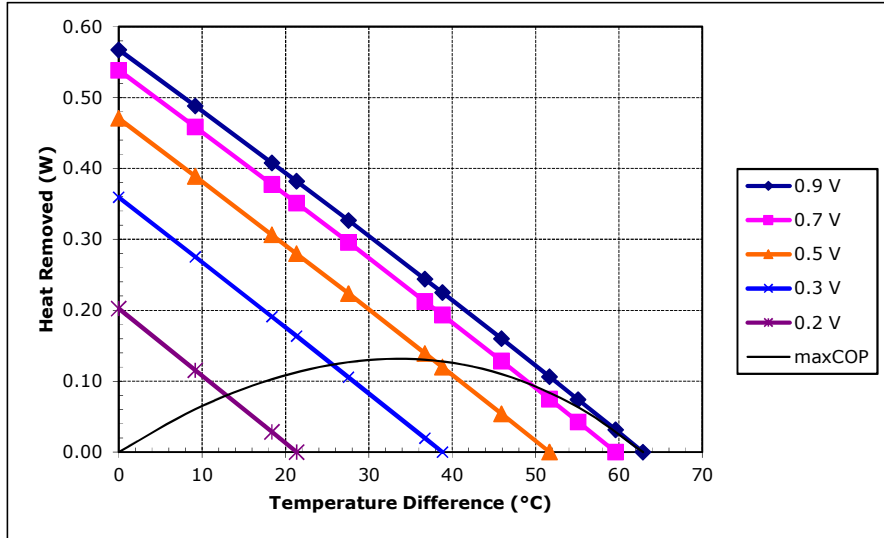





Potted TE-7-0.6-1.5 at a hot-side temperature of 30 °C

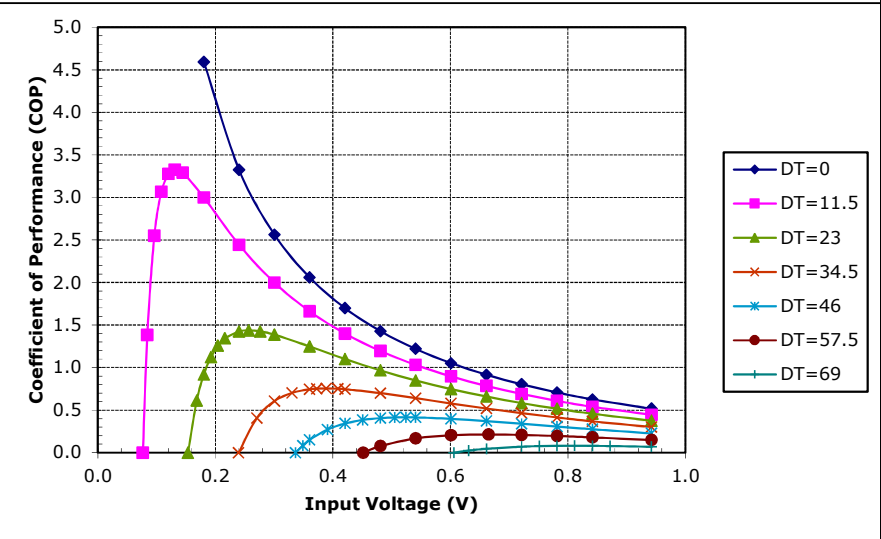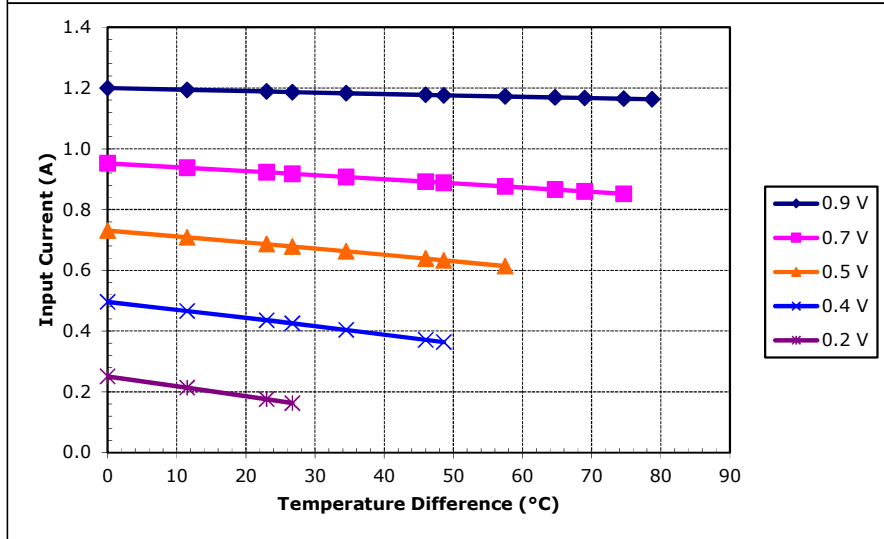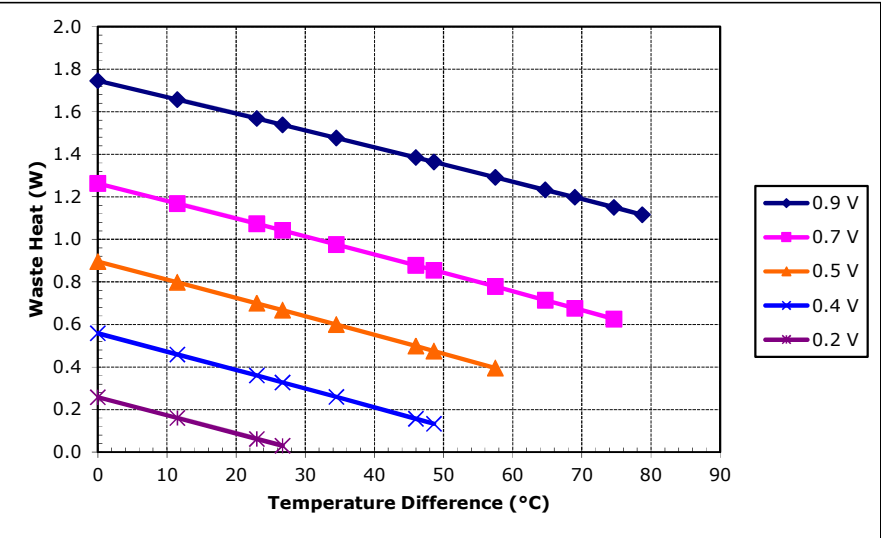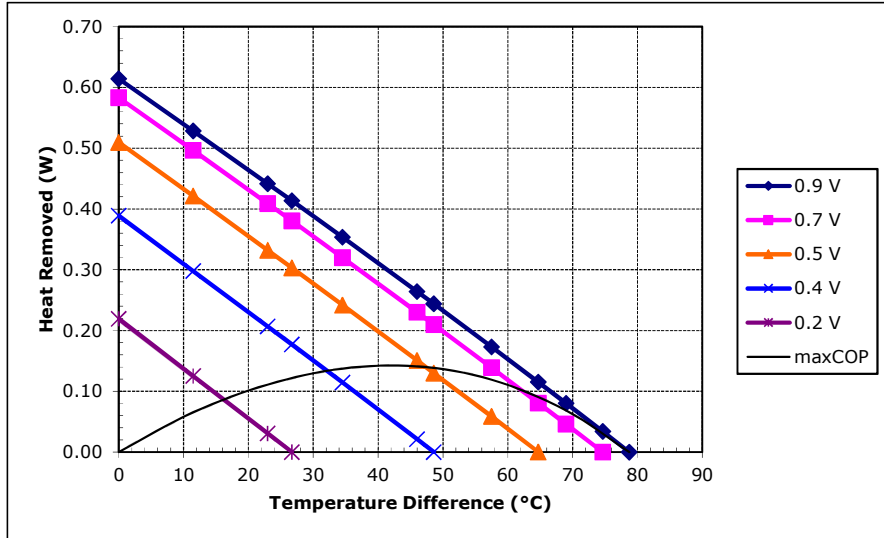





Unpotted TE-7-0.6-1.5 at a hot-side temperature of 50 °C

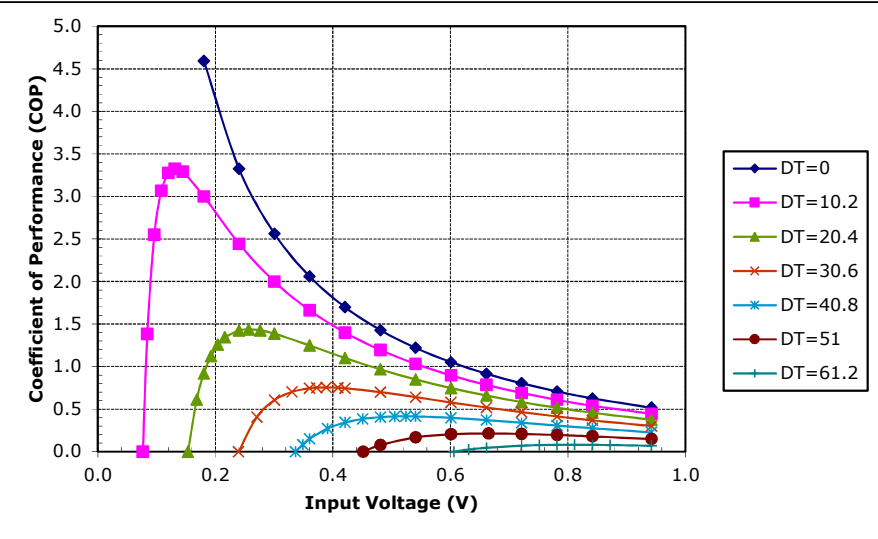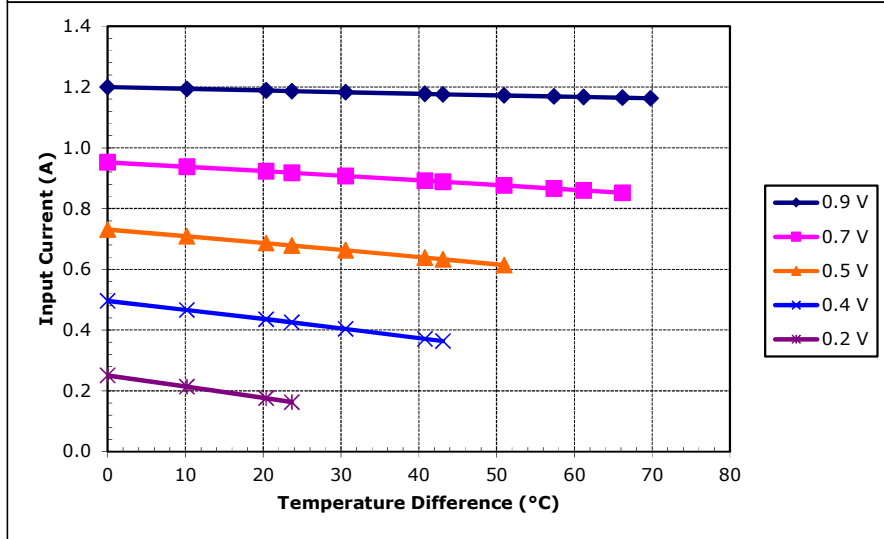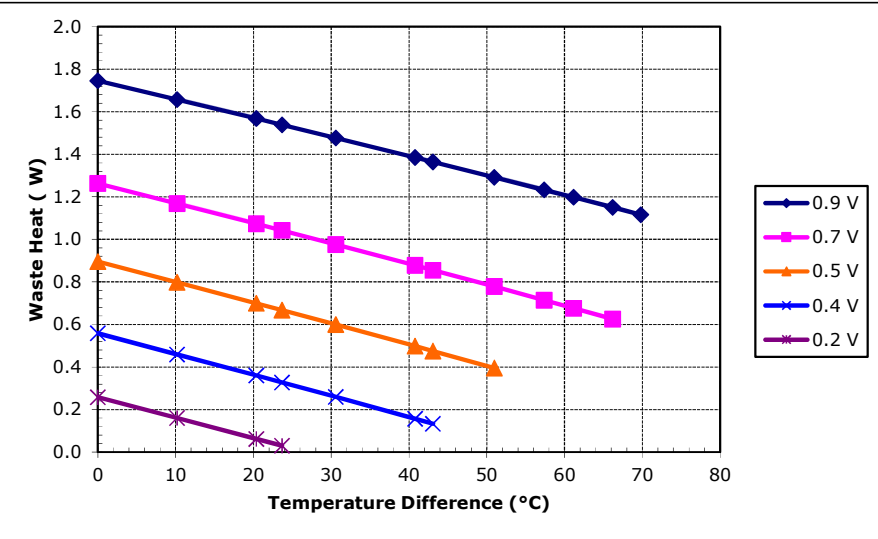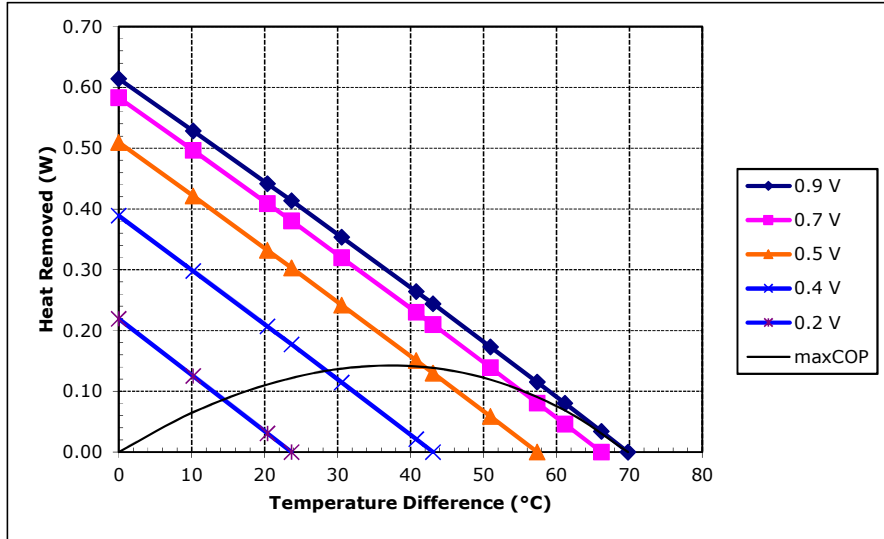

Potted TE-7-0.6-1.5 at a hot-side temperature of 50 °C

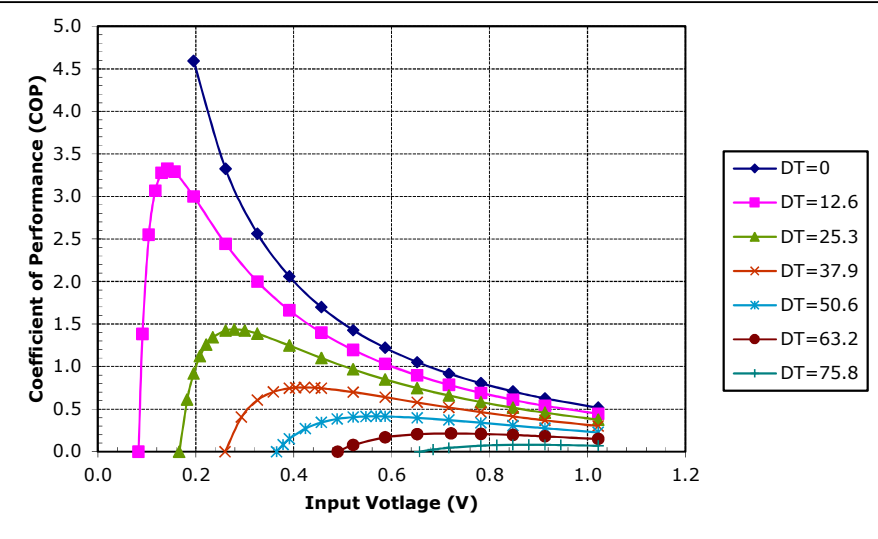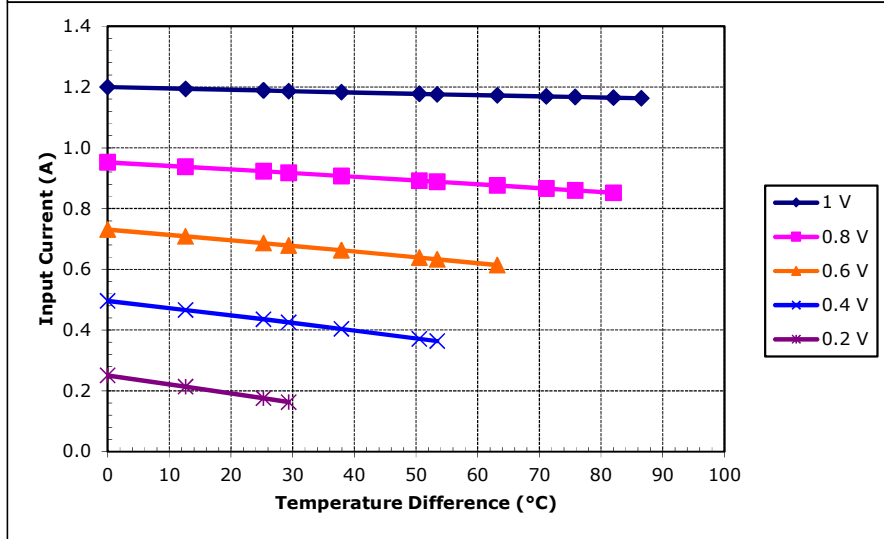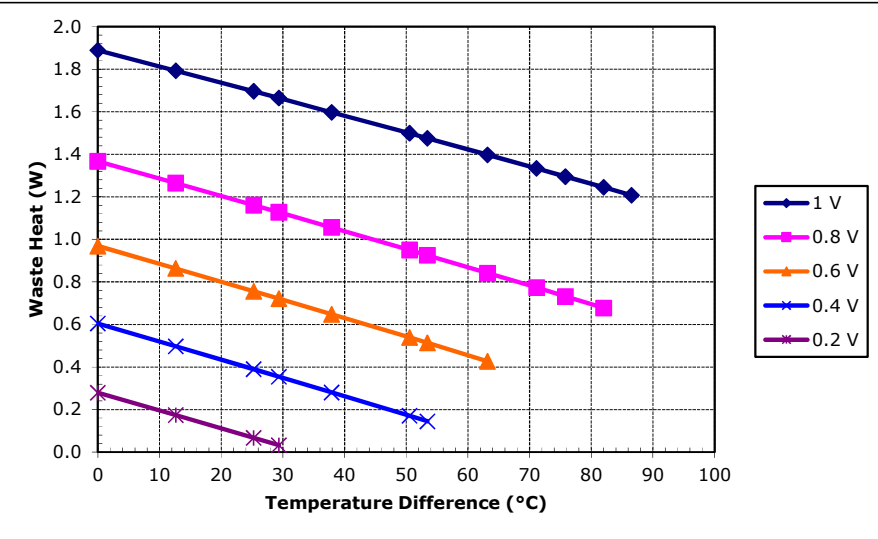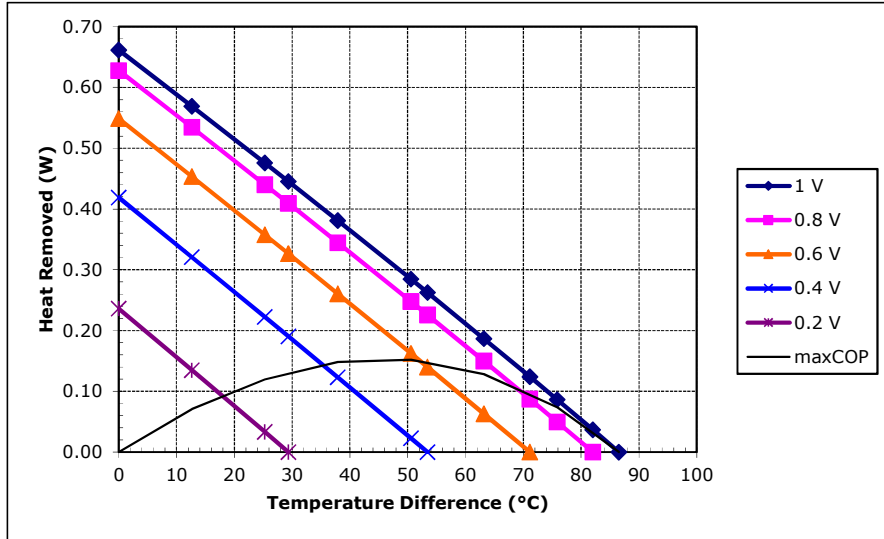

Unpotted TE-7-0.6-1.5 at a hot-side temperature of 70 °C

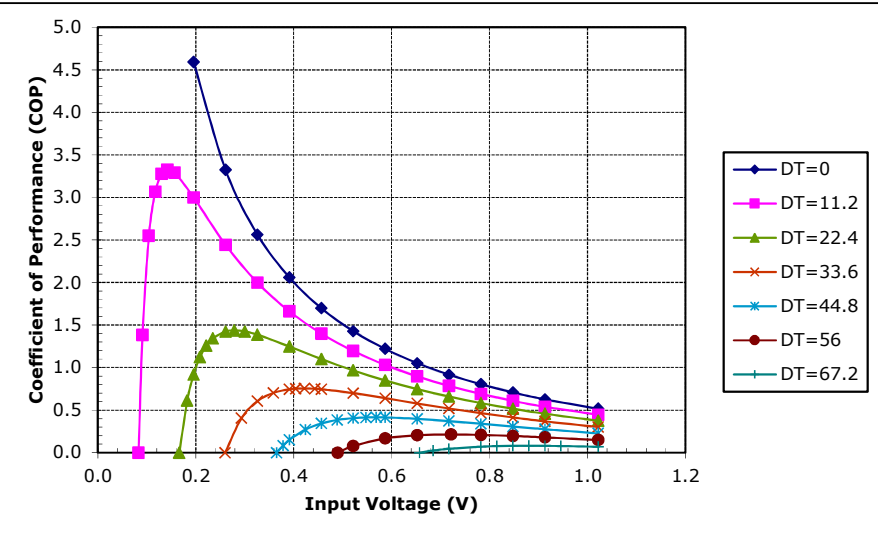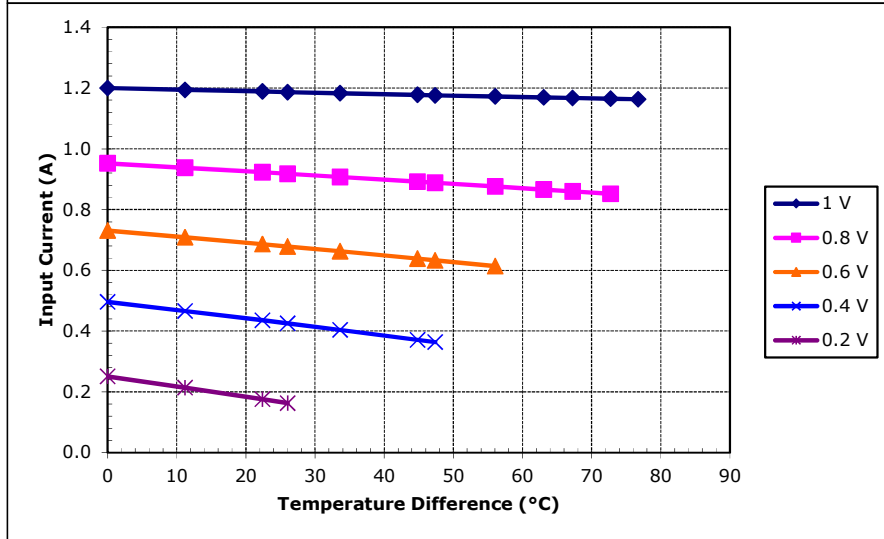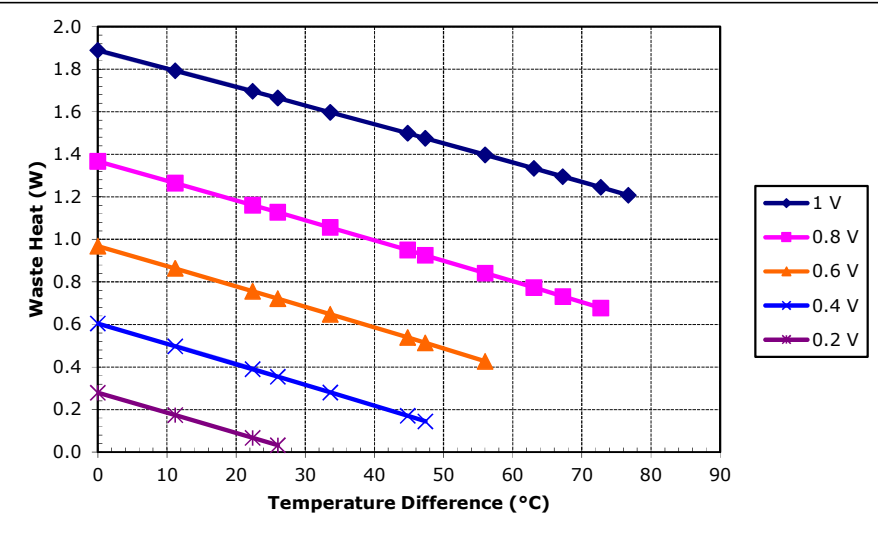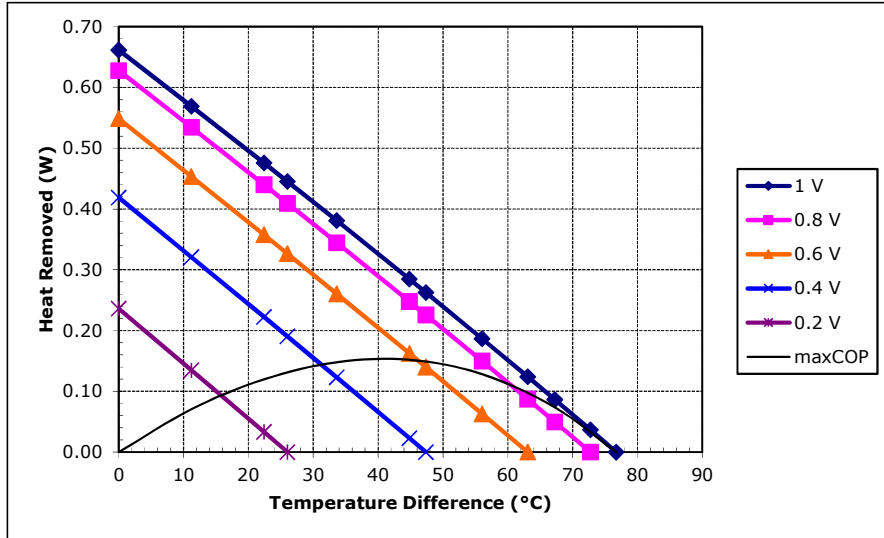

Potted TE-7-0.6-1.5 at a hot-side temperature of 70 °C